



**Eversource Energy**

**And**

**The United Illuminating Company**

**Exhibit B**

**Generator Interconnection Technical Requirements**

**April 11, 2025**

## Table of Contents

<b>1</b>	<b>SCOPE .....</b>	<b>3</b>
<b>2</b>	<b>GENERAL CONSIDERATION .....</b>	<b>3</b>
2.1	GENERAL REQUIREMENTS.....	3
2.2	DISTRIBUTION IMPACT STUDY PHILOSOPHY.....	3
2.3	ADVERSE IMPACT OF GENERATING FACILITY .....	4
2.4	SAFE OPERATION AND MAINTENANCE .....	4
2.5	FUTURE SYSTEM CHANGES AND RESPONSIBILITIES .....	4
2.6	DEFINITIONS .....	5
<b>3</b>	<b>GENERAL DESIGN REQUIREMENTS .....</b>	<b>5</b>
3.1	INTERCONNECTION TRANSFORMER WINDING AND GROUNDING CONSIDERATIONS (CONFIGURATION, FERRO-RESONANCE, ETC.)	5
3.2	POWER QUALITY REQUIREMENTS.....	5
3.3	VOLTAGE REGULATION.....	6
3.4	INSULATION COORDINATION .....	7
3.5	GROUNDING AND BONDING.....	7
3.6	ISOLATION DEVICES .....	8
<b>4</b>	<b>PROTECTION AND CONTROL REQUIREMENTS.....</b>	<b>9</b>
4.1	GENERATOR PROTECTION PHILOSOPHY .....	9
4.2	GENERAL REQUIREMENTS.....	9
4.3	ADDITIONAL REQUIREMENTS FOR INVERTER-BASED INSTALLATIONS.....	13
4.4	ADDITIONAL REQUIREMENTS FOR ENERGY STORAGE SYSTEMS .....	16
4.5	ADDITIONAL REQUIREMENTS FOR INDUCTION GENERATORS.....	17
4.6	ADDITIONAL REQUIREMENTS FOR SYNCHRONOUS GENERATORS.....	17
4.7	CLOSED TRANSITION GENERATORS .....	19
4.8	OPEN TRANSITION GENERATING FACILITIES.....	20
4.9	SPECIAL PROTECTION SYSTEMS.....	21
4.10	PROTECTION SYSTEM CHANGES .....	22
<b>5</b>	<b>INTERCONNECTING GENERATORS WITH NETWORK SYSTEMS.....</b>	<b>22</b>
5.1	AREA NETWORKS.....	22
5.2	SPOT NETWORKS .....	23
<b>6</b>	<b>METERING, MONITORING AND COMMUNICATION .....</b>	<b>24</b>
6.1	METERING.....	24
6.2	MONITORING AND COMMUNICATION .....	24
6.3	COMMUNICATIONS CHANNELS AND SCADA .....	24
<b>7</b>	<b>TESTING AND MAINTENANCE REQUIREMENTS .....</b>	<b>25</b>
7.1	WITNESSING OF COMMISSIONING TEST.....	25
7.2	PERIODIC TESTING.....	26
7.3	SAFE OPERATIONS AND MAINTENANCE .....	27
<b>8</b>	<b>STANDARDS AND APPLICABLE GUIDELINES (IEEE, UL, ANSI, ETC.) .....</b>	<b>27</b>
8.1	PRE-CERTIFIED FACILITIES .....	27
8.2	NON PRE-CERTIFIED FACILITIES.....	27
8.3	CERTIFICATION OF GENERATOR EQUIPMENT PACKAGES.....	28
8.4	CODES AND STANDARDS.....	28
<b>APPENDIX A.....</b>		<b>29</b>
<b>APPENDIX B.....</b>		<b>34</b>

# **1 Scope**

These Generator Interconnection Technical Requirements (“Technical Requirements”) apply to the Interconnection of a Generating Facility to the EPS, regardless of federal or state jurisdiction. These Technical Requirements provide requirements relevant to the safety, performance, reliability, operation, design, protection, testing, metering, monitoring, control, and maintenance of the Interconnected Generating Facility. Among other things, these Technical Requirements are particularly focused on the safety of the general public and the employees and equipment of the EDC. All capitalized terms shall have the meanings specified in the glossary set forth in Attachment XI to the Guidelines for Generator Interconnection: Fast Track and Study Processes.

## **2 General Consideration**

### **2.1 General Requirements**

Any Generator desiring Interconnection with the EPS or modification of an existing Interconnection must meet the specifications set forth in this section and any other requirements which may be imposed by the EDC, including without limitation:

- a. Latest approved version of the IEEE 1547 (Standard for Interconnecting Distributed Resources with Electric Power Systems) and associated 1547 standard and family of guidelines or recommended practices.
- b. Latest approved version of UL (Underwriters Laboratories) 1741 (Inverters, Converters, Controllers and Interconnection System Equipment for use with Distributed Energy Resources).
- c. Latest approved version of UL 1741 supplemental version.

### **2.2 Distribution Impact Study Philosophy**

Generating Facilities will be studied based on the expected operational requirements provided by developers, including, but not limited to, export limitation, charge/discharge schedules, smart inverter functionality, and intentional islanding capabilities. Protective functions will be required to ensure compliance with such operational requirements. If the developer does not provide sufficient details regarding the intended operation of the generator, the EDC will use maximum power export as the study parameter. Refer to section 4.2.8 for examples of acceptable means of export limitations.

### **2.3 Adverse Impact of Generating Facility**

Unintentional Islanding by the Generating Facility of all or part of the EPS (meaning a part of the EPS is kept energized by the Generating Facility after the EPS has de-energized the area) is prohibited as it may result in unsafe conditions on the EPS. The Generator shall comply at all times with Section 6 of the Interconnection Agreement.

### **2.4 Safe Operation and Maintenance**

The Generator shall operate and maintain the Generating Facility in accordance with Good Utility Practice and comply with all aspects of the Interconnection Agreement and applicable Guidelines and tariffs, terms and conditions. Moreover, the Generator shall comply, at all times, with all applicable laws, regulations and other legal requirements. In the event that the Generating Facility may pose an unreasonable risk to the EPS, the Interconnection Agreement provides that (a) the EDC may install equipment to monitor the Generating Facility and (b) the EDC may disconnect the Generating Facility as set forth in the Guidelines.

Arc Flash: The interconnection of a Generating Facility to the EPC system shall not increase available fault current and associated arc flash energy to a level where EPC workers would have to use the next level of enhanced Personal Protective Equipment (PPE) and/or restrictive work methods above and beyond what the workers would normally use for work at the same location without the Generating Facility present.

### **2.5 Future System Changes and Responsibilities**

The EPS is dynamic and must be able to accommodate future load growth and system changes. Therefore, the EDC may, at its discretion and cost, make upgrades to the EPS. Such upgrades may have an impact on existing Generator Facilities and/or Interconnection Facilities. To ensure continued safe operations in compliance with the Interconnection Agreement, the Generator Facilities and/or Interconnection Facilities may need to be upgraded in accordance with the upgraded EPS. The Generator and the EDC will work together and cooperatively to implement the appropriate changes, upgrades, etc. to attain the common goal of continued safe and reliable operation of the interconnection of the Generator to the EPS.

## **2.6 Definitions**

### **a. UL1741**

Throughout this document, UL1741 refers to the latest approved revision including supplements A and B of UL 1741 Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources. This term may be used interchangeable to describe the main standard or supplemental revisions, including future revisions to be adopted by the EDC after the publishing of this document.

### **b. Power Control System (PCS)**

An embedded or stand-alone device designed to manage and optimize power within a complex electrical system. This device may be embedded within an inverter or energy storage device and includes the capability of limiting export power. For clarity within this document, an Energy Management System (EMS) may also provide the same capabilities of a PCS.

## **3 General Design Requirements**

### **3.1 Interconnection Transformer Winding and Grounding Considerations (Configuration, Ferro-resonance, etc.)**

In order to provide maximum operating flexibility for the Generator and to minimize possible adverse effects on the facilities of other EDC customers, the Generator shall provide, at its sole cost and expense, an interconnection transformer between the Generating Facility and the EDC-owned equipment, unless this requirement is waived in writing by the EDC in its sole discretion. The Generator shall propose to the EDC an interconnection transformer and grounding configuration, which shall be subject to the approval of the EDC at its sole discretion. The final winding connection and grounding configuration is subject to the approval of the EDC at its sole discretion.

### **3.2 Power Quality Requirements**

- 3.2.1 The Generating Facility and its Interconnection system shall not inject DC current greater than 0.5% of the full rated output current at the POI.
- 3.2.2 The Generating Facility shall not create objectionable flicker to other EDC customers.

- 3.2.3 Harmonics. When the Generating Facility is serving linear loads, harmonic current injection into the EPS at the PCC shall not exceed the limits listed in the latest version of IEEE 1547 under the following test conditions:
- a. Serving balanced linear loads
  - b. No voltage distortion present.
- 3.2.4 The Interconnection of the Generating Facility shall not increase the potential for ferro-resonance in the EPS.
- 3.2.5 The Interconnection of the Generator Facility shall not cause temporary under voltages or over voltages.
- 3.2.6 An Induction Generator may be connected and brought up to speed as an induction motor if it can be demonstrated that the initial voltage drop (visible flicker) is acceptable and within limits as defined by IEEE 519. When flicker occurs, outside of the IEEE 519 limits, soft starting will be required, such as speed matching to within 1% of synchronous speed or other techniques.

### **3.3 Voltage Regulation**

The Generating Facility shall not: (i) actively regulate the voltage of the EPS unless specifically agreed by the EDC; (ii) cause the voltage at any point along the EPS to deviate from the levels prescribed by the exemption to the upper voltage variation established by the Public Utilities Regulatory Authority by way of Decision, dated March 6, 2019, in Docket No. 03-01-15RE04 or the voltage limits established in Conn. Agencies Regs. § 16-11-115(a), whichever limits are greater (currently +5/-5% for residential and commercial customers ; or (iii) cause any voltage deviations, which are objectionable to other customers of the EDC.

The EDC may regulate the voltage on the EPS by employing load tap changing transformers or line voltage regulators. These devices are typically designed for one-way (forward) power flow to properly regulate the voltage. Therefore, unless specifically waived in writing by the EDC, the Generating Facility shall be required to limit its output so that reverse power flow cannot occur when the proposed Interconnection would be expected to result in reversed power flow through a load tap changing transformer absent such limitation.

When the proposed Interconnection is expected to result in reverse power flow through line voltage regulators, control modifications necessary to mitigate the effects of the reverse power flow may be made, if practical, at the sole cost and expense of the Generator. Otherwise, the Generating Facility will be required to limit its output so that adverse levels of reverse power flow cannot occur.

#### **3.3.1 VAR (Power Factor)**

- a. All Generators other than Induction Generators shall be capable of operating within a power factor range of 0.9 leading to 0.9 lagging. Unless specifically determined through studies performed by the EDC and as may be specified in the Interconnection Agreement, the power factor as measured at the PCC shall be within such range. If the power factor is outside of this range the method and compensation for power factor correction shall be determined by the EDC.
- b. The VAR requirements for Induction Generators shall be determined by the EPS. For aggregate generation of up to and including 100 kW, there will be no charge to the Generator. For aggregate generation greater than 100 kW, the EDC shall charge the Generator a one-time “capacitor charge” to cover the cost of supplying the reactive current to the Generating Facility. This “capacitor charge” shall be based on 0.5 kVAR of capacitors per kW of generator nameplate capacity and will be based on the prevailing rate of installed cost per KVAR by utility grade equipment.

### **3.4 Insulation Coordination**

The Generating Facility and all other equipment connected to the EPS (even in closed transition mode) must be able to withstand the normal and abnormal voltages that can be experienced on the EPS (i.e., normal and abnormal voltages shall not cause damage to or reduce the reliability of any connected equipment). The Generator shall be responsible for procuring equipment with a level of insulation and fault withstands capability compatible with the grounding method specified below.

### **3.5 Grounding and Bonding**

- 3.5.1 The grounding scheme of the Generating Facility Interconnection shall not cause overvoltages that exceed the rating of the EDC’s equipment connected to the EPS and shall not disrupt the coordination of the ground fault protection on the EPS.

3.5.2 Generating Facility shall be effectively grounded. To achieve effective grounding, the DER owner shall design and install an interconnection system where the ratio of the DER's reactance parameters meets the following criteria:

a.  $1 < X_0 / X_1 < 3$

b.  $R_0 / X_1 < 1$

Where,

$X_0$  is the zero-sequence reactance at the PCC

$R_0$  is the zero-sequence resistance at the PCC

$X_1$  is the positive sequence reactance at the PCC

### **3.6 Isolation Devices**

#### **3.6.1 Low Voltage Applications ( $\leq 600$ volts):**

For voltages equal to or less than 600 volts on the EPS, the Generator shall own, install, operate and maintain an external Isolation Device (or comparable device mutually agreed upon by the parties) for the Generating Facility that can be opened for isolation. The Isolation Device shall be operated by the Generator's personnel and shall be in a location easily accessible by EDC personnel at all times. The Isolation Device shall: (i) be gang operated; (ii) have a visible break when open; (iii) be rated to interrupt the maximum Generator Facility output; and (iv) be capable of being locked open. Although EDC personnel will normally not operate the Isolation Device, the EDC reserves the right to have its personnel open the Isolation Device in an emergency. If an existing Isolation Device at the Generating Facility meets the requirements of this section, then this requirement of an additional Isolation Device may be waived by the EDC.

The Generator shall maintain the Isolation Device in good working condition. The EDC shall not be responsible for any damage to the disconnect switch or the Isolation Device.

#### **3.6.2 High Voltage Applications ( $> 600$ volts):**

The EDC shall own, install, operate and maintain the Isolation Device when the Isolation Device is required to be installed at voltages greater than 600 volts on the EPS. The EDC will determine the size, type and rating of such Isolation Device. An existing Isolation Device, if deemed adequate for the application by the EDC, may be sufficient. If a new Isolation Device is required, then the cost of such device, including the installation thereof, will be borne by the Generator.

## **4 Protection and Control Requirements**

### **4.1 Generator Protection Philosophy**

One of the core objectives of these Technical Requirements is to protect the public, EDC personnel and the EPS from unsafe or unstable operating conditions. Therefore, much of the focus of these Technical Requirements is on the use of protective functions designed to prevent the Generating Facility from causing a system failure or propagating disturbances onto the EPS during normal operations. Such requirements are designed solely to protect the public (and EDC employees) and the EPS and are not designed to protect the Generating Facility or the Generator's other facilities and equipment. The Interconnection of the Generating Facility to the EPS will not be allowed to degrade the reliability of the EPS either as a result of its operation or as a result of changes to the EPS to accommodate the Interconnection.

From time to time, protective relays and microprocessors used in protective relays and inverters must be removed from service for maintenance, testing, and revision upgrades. During such times, the Generating Facility shall not operate in parallel with the EPS without adequate protection in service and functioning as approved. Additionally, for firmware upgrades, the EDC may require witness testing by the EDC to determine the success of any such upgrade. The Generating Facility is required to review any such upgrade with the EDC before any such upgrade is attempted.

### **4.2 General Requirements**

4.2.1 Section 2.1 of these Technical Requirements is generally applicable to all of these Technical Requirements and should be reviewed in concert with Section 4.

4.2.2 The specifications and requirements listed herein are intended solely to mitigate possible adverse impacts caused by the Generating Facility to the EDC's equipment and to the reliability of its EPS as well as to protect the safety of the EDC's personnel, the public, and other customers of the EDC. They are not intended to address protection of the Generating Facility itself or internal load on the Generating Facility side of the PCC. It is the responsibility of the Generator to comply with the requirements of all appropriate standards, codes, statutes, and authorities to protect itself and its loads. The Generator must be aware of the risk of single phasing and of voltage transients (and other normal system disturbances as described herein) that accompany Interconnection with the EPS. In accordance with the Interconnection Agreement, it is the Generator's responsibility to protect the Generating Facility from these risks.

4.2.3 The EDC shall make available to, upon request, system protection information directly related to

the Point of Interconnection, which information may be used by the Generator solely to evaluate protection of its Generating Facility during parallel operation and for no other purpose.

4.2.4 The design of the Generating Facility's protection and control scheme shall take into account the EDC's practice of automatically reclosing portion(s) of its EPS without synchronism check after one or more portion(s) of the EPS have been tripped. The de-energized portion of the EPS may be re-energized at any time after de-energization. If the EDC's reclosing practices are found to be incompatible with the Interconnection of the Generating Facility, the EDC may choose to modify the EPS to accommodate that Interconnection, which modification shall be at the Generator's sole cost and expense.

4.2.4.1 Unless otherwise agreed by the EDC, if the Generating Facility has been tripped off-line, then the Generating Facility's control system shall not permit the Generating Facility to be reconnected to the EPS for at least five (5) minutes after normal system conditions are re-established.

4.2.4.2 The Generating Facility shall be designed to accommodate reclosing of the EPS even if no reclosing exists at the time of Interconnection. If the Generating Facility's protection cannot be designed to be compatible with the EDC's reclosing practices, other anti-Islanding measures will be required at the Generator's sole cost and expense (e.g., a dedicated circuit supply or direct transfer trip protective relaying from all EDC sources and isolation points).

4.2.5 Protective relays required by these Technical Requirements shall either be Utility Grade or certified to UL 1741 and IEEE C62.41 and IEEE C62.45, as amended from time to time. Equipment tested to UL 1741 needs only prove compliance with latest revision and supplements. The time characteristics of these relays must be reviewed and approved by the EDC prior to purchase by the Generator in order to achieve coordinated timing with the EDC's protective devices.

4.2.6 The Generating Facility shall not operate in parallel with the EPS without properly functioning protective equipment required by these Technical Requirements.

4.2.6.1 Generating Facilities (of less than or equal to 1 MW in size) are not required to provide redundancy in protective functions. However, if such a Generating Facility desires to operate in parallel with the EPS with its required protective equipment out of service, the design of that facility shall include redundant protection functionality installed in parallel to facilitate the removal of that protective relaying from service for any reason.

4.2.6.2 Generating Facilities (above 1MW in size) shall be designed in a manner such that the Generating Facility protection shall provide sufficient redundancy in protective function(s) so that no single protective equipment failure can remove any protective function required by the EDC.

4.2.7 The EDC has adopted UL 1741 (including IEEE C62.41) for certifying the electrical protective functionality of independent power systems, including Generating Facilities. UL 1741 compliance may be established by UL or other Accredited, Nationally Recognized Testing Laboratories (NRTL). The EDC also accepts inverter-based Generating Facilities that are installed in multiple packs and that have been certified to UL 1741 in this configuration.

4.2.8 Generating Facilities that are not intended to export power to the EPS but which are capable must use an EDC approved method of limiting export. Similarly, generating facilities which do intend to export power to the EPS may be required by the EDC to limit export below an identified threshold.

4.2.8.1 Generating facilities greater than or equal to 200kW and are capable of exporting power to the EPS must include either:

- a. a reverse power (32R)  
*or*
- b. a under-power (32U) relay  
*or*
- c. a corresponding function in a multifunction microprocessor.

A reverse power element (32R) operates whenever power is exported from a Generating Facility onto the EPS for periods beyond those expected during normal system transient conditions. An under-power element (32U) ensures the Generating Facility is always importing some preset level of power. If the import level drops below the "under-power" threshold, then the element will operate to trip the Generating Facility. The under-power element (32U) must be used in cases where a reliable (32R) (export trip) cannot be guaranteed. (See Appendix A for recommended settings).

4.2.8.2 Generating facilities which are less than 200kW may utilize a PCS, EMS, or other agreed upon means to limit export of the facility to the EPS. The EDC may allow the use of new technologies as they become available to the public. Any PCS, EMS, or other device will require review and approval by the EDC.

- 4.2.8.3 It is recognized that for business model reasons, for technical reasons such as limitations in an existing facility, or for process reasons such as the acceleration of the application approval or reduction in studies required, the Generator may choose to operate the facility exclusively in a non-export mode.
- 4.2.9 The Generator shall submit to the EDC for review and acceptance the settings for all devices with protection functions that could affect the Interconnection. These devices include all relays, adjustable inverters and controllers that provide protective functions used for EDC-required protection. These settings shall be provided to the EDC no later than twenty (20) Business Days prior to the scheduled date for setting those relays/inverters/controllers. The Generator shall provide both a paper and an electronic copy of the setting file for all settings within any electronic multifunction relay. The Generator must also provide the most recent revisions to the schematics and wiring diagrams listed in Attachment I to the applicable Guidelines ("Interconnection Request"). The Generator shall also submit to the EDC a written description of the operation as programmed for each of the protective relay schemes that could affect the Interconnection. Each such protective relay scheme description shall list all inputs to the protective relay, the function(s) performed on these inputs, and a list of all outputs driven by the relay. The vendor instruction manual will not be acceptable for this purpose.
- 4.2.10 Over-and under-voltage and over-and under-frequency protective relay functions are required for all Generating Facilities interconnected to the EPS. This requirement also applies to closed transition transfer schemes that result in the Generating Facility operating in parallel to the EPS for 100 milliseconds or longer. Voltage sensing on all three phases shall be used for the required voltage relaying for maximum sensitivity for phase disturbances.
- 4.2.11 All protection functions required by the EDC for protection of its EPS shall be designed in such a way that a loss of AC power will not compromise that protection. Acceptable methods include but are not limited to: undervoltage trip, DC battery systems, and UPS systems.
- 4.2.12 An Interconnection interrupting device such as a circuit breaker or contactor shall be installed to isolate the Generating Facility from the EPS. All such Interconnection interrupting devices must be capable of interrupting the maximum available short circuit current and the current produced when the Generating Facility is connected out of phase. For the avoidance of doubt, if the Generating Facility has multiple interrupting devices, this requirement applies to each such device.
- 4.2.13 An interconnection circuit breaker equipped with all appropriate protective devices defined in this document shall be located at the PCC in addition to any required interrupting device(s) and

protection devices required at the generator. However, if a Generator meets certain requirements, the EDC may elect to waive the separate protection devices at the PCC. In order for the EDC to consider waiving the separate protection devices at the PCC all of the following conditions must be met (unless waived by the EDC):

- a. Total Generation Facility Capacity is less than 1MW.
- b. Generation Facility Capacity is less than 1/3 of its total minimum load.
- c. Generating Facility is designed as a net-import facility at all times (no power exported to EPS).
- d. Generator has interrupting and protection devices meeting all other requirements in this document.

4.2.14 Voltage relays that can be connected directly to the Generating Facility's line voltage without a voltage transformer (VT) are acceptable to the EDC

4.2.15 Unless otherwise agreed by the EDC in writing, protective relay schemes shall be hardwired to the device they are tripping. Test switches are required in the current, voltage and trip circuits.

4.2.16 Current Transformer (CT) ratios and accuracy classes for CTs as used in the Generating Facility protection shall be consistent with ANSI and IEEE standards.

#### 4.2.17 Voltage Transformers

The Generating Facility shall be equipped with a direct voltage connection or a VT, which shall be connected to the EDC's side of the interrupting device. For three-phase applications, a VT for each phase is required. If the interconnecting voltage transformer is ungrounded at the EDC voltage, this VT shall be a single three-phase device or three single-phase devices connected from each phase to ground on the EDC's side of the Generating Facility's interconnecting transformer, rated for phase-to-phase voltage. The secondary winding shall be connected in open delta, have a loading resistor to prevent ferroresonance, and supply a zero-sequence over-voltage relay. On one side of the relay/resistor, the connection shall be grounded.

Relays that (i) are capable of calculating zero-sequence voltages, and (ii) can be directly connected at the utilization voltage, may be utilized in lieu of grounded-wye to open delta VTs.

### 4.3 Additional Requirements for Inverter-Based Installations

Current inverter systems are capable of performing many of the required protective functions internally, without the need for additional protective equipment. Therefore, additional standards are applicable to inverter-based technologies. Two external standards shall apply to inverter-based Interconnections: (1) IEEE Standard 1547, (Standard for Interconnecting Distributed Resources with Electric Power Systems): and (2) UL Standard 1741 and UL Standard 1741 SA, "Inverters,

Converters, Controllers and Interconnection System Equipment for use with Distributed Energy Resources.” These standards set forth the nominal voltage and frequency parameters that must be met and the limits allowed for anomalies such as flicker and interference, as well as the time allowed for disconnection when the required parameters are no longer being met or for reconnection following a system failure or automatic disconnection.

The EDC recognizes the concept of “Type Certification” (sometimes called pre-certification) which requires that the inverter-based units undergo standardized testing, usually by an Accredited Nationally Recognized Testing Laboratory (e.g., Underwriter’s Laboratory), and that the results of those tests be made publicly available. Type certified units typically must also be “listed” by the laboratory and the equipment labeled as such. Advanced inverters also provide grid support functionality and can assist with resource availability in the event of a bulk power system or other disturbance. As such and unless agreed upon by the EDC, inverters must also be set as per the guidance provided in Appendix C.

- 4.3.1 The technical requirements for certified inverter based Generating Facilities, 25kW and less, are found in a separate document, the Eversource Energy/UI “Guidelines for the Interconnection of Residential Single Phase Certified Inverter-Based Generating Facilities of 25 kW (ac) or Less.”
- 4.3.2 The requirements of UL 1741 may be applied to inverters with photovoltaic and other electric energy sources. An inverter is considered approved if it is certified to the UL 1741 testing procedure and it has passed the required tests without failure to comply with IEEE C62.41 and C62.45. Proof of certification under UL1741 and compliance with IEEE C62.41, and C62.45 shall be required. As of May 7, 2007, UL 1741 includes the requirements within it of IEEE C62.41, and C62.45. Therefore, equipment tested to UL 1741 after that date need only prove compliance with UL 1741.
- 4.3.3 It is the Generator’s responsibility to submit written evidence that the proposed Generating Facility has been UL 1741 certified. Generators should contact the Generating Facility’s supplier to determine if it has been listed.
- 4.3.4 Non-certified inverters must have either non-islanding or anti-islanding protection as defined by IEEE 1547 and conform to the maximum harmonic limits prescribed in IEEE 519. Non-certified inverters must be protected by certified or Utility-Grade Relays, using settings approved by the EDC.
- 4.3.5 Self-commutated inverters with external frequency sensing may be used to synchronize the Generating Facility with the EPS. The following requirements apply to such inverters:

- 4.3.5.1 The Generator shall use one or more synchronizing devices such as motorized breakers, contactor/ breaker combinations, or a fused contactor (if mutually agreeable) to connect the Generating Facility to the EPS. This synchronizing device shall not be the Interconnection interrupting device. This synchronizing device shall be capable of interrupting the current produced when the Generating Facility is connected out of phase with the EPS consistent with IEEE 1547, Section 4.1.8.3.
- 4.3.5.2 All synchronizing shall be done by the Generator at the Generating Facility. The Generating Facility shall not be used to energize a de-energized EDC circuit.
- 4.3.5.3 In-line breakers, contactors, or switches without synchronizing devices require electrical or mechanical interlocks to prevent out-of-phase closing with the EPS.
- 4.3.5.4 All synchronizing schemes used for interconnecting a Generating Facility with the EPS must conform to the synchronizing requirements of the latest version of IEEE 1547. Automatic synchronizing schemes are preferred.

## 4.4 Additional Requirements for Energy Storage Systems

### 4.4.1 Impact Study Requirements:

- 4.4.1.1 In order to conduct a distribution impact study for a Storage System, a proposed dispatch limiting schedule (DLS) shall be provided to the EDC by the developer. The DLS will include the maximum dispatch schedule for both charging and discharging activity of the system as shown in the sample tables below. The time shown in the table row is for reference only and can be changed by the developer to fit their intended operational schedule. See Table 4-1 and Table 4-2 below.
- 4.4.1.2 Prior to developing a DLS, the EDC must provide minimum load or peak load data for the substation and circuit. The minimum load data for charging and discharging will be provided for all four seasons, Spring (March, April and May), summer (June, July and August), Fall (September, October and November) and Winter (December, January and February). The following data will be developed during a distribution Feasibility study as described in the Guidelines for Generator Interconnection Fast Track and Study Process. Alternatively, such data may be provided in the EDC hosting capacity maps in which case, no study will be required.
- 4.4.1.3 The EDC's will conduct a Distribution Impact Study based on submitted DSL within the schedule windows proposed for the peak load and minimum load/peak generation day. Based on results of the study analysis, the EDC may communicate the need for adjustments to the DSL in order to avoid distribution system upgrades.
- 4.4.1.4 Compliance with the approved DSL for each project will be treated as a required operational restriction and detailed in the Interconnection Agreement. Enforcement of this required compliance, such as a Real Time Automatic Controller or a DER management system, will be determined by the EDC. Refer to section 6 for Monitoring and control requirements.

	Maximum Discharge (MW)			
Discharge Limiting Schedule	8:00 – 10:00	10:00 – 16:00	16:00 – 18:00	18:00 – 8:00
Spring (March, April, May)				
Summer (June, July, August)				
Fall (Sep, Oct, Nov)				

Winter (Dec, Jan, Feb)				
------------------------	--	--	--	--

**Table 4-1**

	Maximum Charge (MW)			
Charge Limiting Schedule	8:00 – 10:00	10:00 – 16:00	16:00 – 18:00	18:00 – 8:00
Spring (March, April, May)				
Summer (June, July, August)				
Fall (Sep, Oct, Nov)				
Winter (Dec, Jan, Feb)				

**Table 4-2**

#### **4.5 Additional Requirements for Induction Generators**

Unless the EDC shall determine otherwise, there are no additional protection requirements applicable only to Induction Generators.

#### **4.6 Additional Requirements for Synchronous Generators**

The following additional relay functions are required for Synchronous Generators. Settings for these relays shall be submitted to the EDC for review. See Appendix 4.2.8A for setting guidance.

##### **4.6.1 Relays for Synchronous Generators**

- a. 51V Over-Current (Voltage Control or Restrained). This element provides backup phase over-current protection for system faults under a collapsed voltage condition.
- b. 59G Over-Voltage (Ground). This element detects ground faults in the event that a ground N over-current source is lost. When studies show it can operate reliably, an alternative to the 59G is a 51N over-current (Ground). This element provides ground over-current protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value.
- c. 25 Synchronizing or Synch-Check. This element supervises the operation of the Generator automatic or manual synchronizing system by ensuring proper voltage phase angle matching and, where appropriate, slip frequency between the EPS and the Generating Facility before the breaker is allowed to close.

##### **4.6.2 Relays settings for Synchronous Generators**

Any or all of the following additional relay functions may be required by the EDC. Settings for these relays shall be submitted to the EDC for review. See Appendix A for setting guidance.

- 4.6.2.1 32R Reverse Power. This element is used on systems designed as import only systems to ensure no power is exported onto the EPS.
  - 4.6.2.2 32U Under-Power. This element performs a similar function to the 32R element, except it ensures the Generating Facility is always importing some level of power.
  - 4.6.2.3 46 Negative Sequence Current. This element serves to protect both the EPS and the Generator system from system unbalances including single phasing.
  - 4.6.2.4 51 Phase Over-Current. This element provides over-current protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value.
  - 4.6.2.5 51N Ground Over-Current. This element provides ground over-current protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value.
  - 4.6.2.6 67 Directional Phase Over-Current. This element provides directional phase over-current protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value in a specified direction.
  - 4.6.2.7 67N Directional Ground Over-Current. This element provides directional ground over-current protection and operates with an inverse time-current characteristic when its current exceeds a predetermined value in a specified direction.
  - 4.6.2.8 86 Lockout Relay. This auxiliary relay is electrically tripped by the Generating Facility protection and in turn trips the isolating circuit breaker(s). It can only be reset manually after all protective trips have been cleared.
- 4.6.3 Synchronizing Devices

- 4.6.3.1 The Generator shall designate one or more synchronizing device(s) such as motorized breakers, contactor/breaker combinations, or a fused contactor (if mutually agreeable) to be used to connect the Generating Facility to the EPS. This synchronizing device may be a device other than the Interconnection interrupting device. The synchronizing device must be capable of interrupting the current produced when the Generating Facility is connected out of phase with the EPS consistent with IEEE 1547, Section 4.1.8.3 as amended from time to time.
- 4.6.3.2 All synchronizing will be done by the Generator at the Generating Facility. The Generating Facility shall not be used to energize a de-energized EDC circuit.
- 4.6.3.3 In-line breakers, contactors, or switches without synchronizing devices require electrical or mechanical interlocks to prevent out-of-phase closing with the EPS.
- 4.6.3.4 All synchronizing schemes used for interconnecting a Generating Facility with the EPS must conform to the synchronizing requirements within the current version of IEEE 1547. Automatic synchronizing schemes are preferred.
- 4.6.3.5 The Generator shall provide relaying functions to clear both phase and ground short circuit faults on the EDC's distribution circuit. The operating characteristics thereof shall be subject to review and approval by the EDC.

#### **4.7 Closed Transition Generators**

- 4.7.1 A closed transition, "make-before-break" Generating Facility must be synchronized with the EPS prior to transfer occurring. The transfer scheme will then parallel the Generating Facility with the EPS for less than 100 milliseconds. During this brief period, the load will be either transferred to the Generating Facility from the EPS or to the EPS from the Generating Facility. The design of the transfer scheme shall prevent the possibility of sustained parallel operation of the Generating Facility with the EPS.
- 4.7.2 The closed transition scheme and transition equipment used by the Generator must be reviewed and approved by the EDC prior to operation of the Generating Facility. The closed transition scheme must provide voltage, frequency and phase angle matching as appropriate to provide a smooth transition. It must also provide maximum paralleling time protection. This protection is described below in Section 4.6.3.
- 4.7.3 Protective relays isolating the Generating Facility from faults in the EPS shall not be required if the

paralleling operation is automatic and takes place for less than 100 milliseconds. Maximum paralleling time protection must be provided by a separate device from the equipment used for control and paralleling of the generator and operation of the transfer switch. (See Appendix B for details on the required logic for this protection.) This protection shall (i) use a discrete solid-state timer (pneumatic timers are unacceptable for this purpose), (ii) be powered by the generator battery and (iii) trip an interrupting device (which may be the generator breaker) that ceases parallel operation of the generator. This requirement shall prevent sustained operation should the control equipment malfunction.

- 4.7.4 The parallel operation of a closed transition Generating Facility lasting 100 milliseconds or more requires the same protective relay functions as would a Generating Facility operating in sustained parallel operation with the EPS as described in these Technical Requirements.
- 4.7.5 The Generator, at a minimum, must perform the following functional tests after its transfer equipment has been energized, but before the closed-transition transfer is allowed on the EPS as a normal operation:
  - a. Voltage, frequency, and phase rotation.
  - b. Transfer test (maximum paralleling time must be less than 100 milliseconds); and
  - c. Excessive parallel time test (when the EDC source switch fails to open), the protection must trip an interrupting device (which may be the Generating Facility's breaker) that ceases parallel operation of the generator.

The EDC must be notified ten (10) Business Days in advance of such testing so that it may, at its option, have its personnel observe the testing, and/or inspect the installation.

- 4.7.6 Before the approval of closed-transition transfer is granted by the EDC, the Generator must provide to the EDC a report attesting to the successful completion of the above testing. Upon receipt by the EDC of the approved test and inspection reports, along with a verification of the local Electrical Inspector's approval, the EDC will issue a written notice of approval of closed-transition transfer to the Generator.

#### **4.8 Open Transition Generating Facilities**

Connection of a Generating Facility with open transition transfer does not require an Interconnection Application and is permissible on the condition that such Generating Facility's manual or automatic transfer switch will not allow any parallel operation of the Generating Facility

with the EPS. This electrical state (i.e., open transition transfer) is typically referred to as “break-before-make,” which means that the Generating Facility’s transfer switch must be designed and operated to prevent the EPS-provided power and the Generating Facility-provided power from powering the Generator’s facility circuits (i.e., load) at the same time. Consequently, this mode of operation will also prevent the Generating Facility from potentially energizing the EPS.

## **4.9 Special Protection Systems**

### **4.9.1 The EDC May Require additional anti islanding protection Whenever:**

- 4.9.1.1 The minimum load to generation on a circuit creates the possibility that an unacceptable abnormal operating condition could occur.
- 4.9.1.2 It is determined that the Generating Facility’s protective relaying may not operate during certain conditions or faults; or
- 4.9.1.3 The installation could increase the length of outages on a distribution circuit or jeopardize the reliability of the circuit.

The Generator shall be responsible for all costs and expenses incurred by the EDC to install additional anti-islanding protection. EDC may require a Dynamic Risk of Islanding Study in order to evaluate the risk of unintentional islanding.

### **4.9.2 High Speed Protection**

If the EDC determines that relaying used traditionally on the distribution system cannot operate quickly enough to avoid adverse system impacts, the EDC may require that the Generating Facility use either direct transfer tripping techniques or more sophisticated techniques that rely on protective relay communication to increase operating speed.

### **4.9.3 Recloser Schemes**

Any Generating Facility proposed for Interconnection at a point on the EPS that is supplied by an existing recloser scheme shall require special studies to determine the feasibility of that Interconnection as proposed. The Interconnection of the Generating Facility to the EPS shall not

degrade the reliability of the EPS as a result of either its operation or changes to the EPS to accommodate the Interconnection. If the Generating Facility's protection cannot be designed to meet these requirements, other anti-Islanding measures will be required (such as a dedicated circuit supply or DTT protective relaying from all EDC isolation points). Any changes to the EPS's protective schemes or settings, or to the Generating Facility necessary to accommodate the Interconnection shall be at the Generator's sole cost and expense.

#### **4.10 Protection System Changes**

- 4.10.1 The Generator shall provide the EDC with reasonable advance notice of any proposed modifications to the Generating Facility's protective relay system, relay settings, operating procedures or other equipment affecting the Interconnection. The EDC will determine if such proposed modifications require re-acceptance of the Interconnection per the requirements of this Section 4.
- 4.10.2 The EDC shall provide the Generator with reasonable advance notice of any proposed changes to be made to its protective relay system, relay settings, operating procedures or other equipment that affects the Interconnection.

### **5 Interconnecting Generators with Network Systems**

Other sections of these Technical Requirements are applicable to Generating Facilities interconnected with radial primary or secondary distribution circuits, the most common distribution configuration. In large cities, however, a number of electric utility companies use low-voltage network systems. These low-voltage networks are of two subtypes: (1) the secondary grid network (also referred to as an area network, grid network, or street network) that serve; numerous sites, usually several city blocks, from a highly interconnected grid at 120/208 V, three-phase; and (2) the Spot Network that serve independent, large buildings usually at 277/480 V, three-phase.

When completed, the IEEE standard development project P1547.6, "Draft Recommended Practice for Interconnecting Distributed Resources with Electric Power Systems Distribution Secondary Networks", will cover both secondary grid networks and Spot Networks.

#### **5.1 Area Networks**

A Generating Facility proposed to be interconnected to the load side of an Area Network protector must utilize an inverter-based equipment package and, when aggregated with other inverter-based

generation, shall not exceed 50 kW at any location. A location is defined as any manhole or service box. This criteria is designed to ensure that no more than 50 kW of DG is located between the same set (s) of cable limiters. In addition, the aggregate DG interconnected to an area network will be limited to 3% of the maximum network transformer connected kVA with the feeder supplying the largest number of network units out of service, or a maximum of 500 kW, whichever is less.

## **5.2 Spot Networks**

A Generating Facility proposed to be interconnected to the load side of Spot Network protectors must utilize an inverter-based equipment package and, when aggregated with other inverter-based generation, shall not exceed the lesser of five percent (5%) of a Spot Network's maximum load or 50 kW. The inverter must be certified to stop conducting prior to the three (3) cycle response of the network protector relays. In addition, all the following requirements of IEEE 1547 must be met as amended from time to time:

- 5.2.1 Network protectors shall not be used to separate, switch, serve as breaker failure backup, or in any manner isolate a Generating Facility's network or network primary feeder from the remainder of the EPS, unless such protectors are rated and tested per applicable standards for such an application.
- 5.2.2 Each Generating Facility connected to a Spot Network shall be coordinated with the EPS such that it will not affect the operation or prevent closing of any network protectors installed on the Spot Network. Such coordination shall be accomplished without any changes to prevailing network protector clearing time practices of the EPS.
- 5.2.3 Connection of the Generating Facility to the EPS shall be permitted only if the EPS network bus is already energized by more than 50% of the installed network protectors are in operation.
- 5.2.4 The Generating Facility's output shall not cause any cycling of network protectors. The Interconnection of the Generating Facility shall not cause the network equipment loading and fault interrupting capacity to be exceeded.
- 5.2.5 Any Generating Facility installation on a Spot Network that utilizes an automatic transfer scheme in which load is transferred between the Generating Facility and the EPS in a momentary "make-before-break" operation shall meet all the requirements of Section 5.2 regardless of the duration of paralleling.
- 5.2.6 The Generating Facility shall not utilize a stand alone inverter capable of operation independent of the EPS.

## **6 Metering, Monitoring and Communication**

### **6.1 Metering**

Metering requirements varies depending on the applicable Tariff. EDC to post metering requirement by Tariff on Company web page.

a. For Eversource:

Please refer to [Information & Requirements for Electric Supply Below 600 Volts](#)

b. For UI:

Please refer to [Guidebook of Requirements for Electric Service](#)

### **6.2 Monitoring and Communication**

All DER, regardless of technology, certified and non-certified DER equal or greater than 500 kW require SCADA visibility for standalone facilities and behind-the-meter facilities. However, on a case-by-case basis, the EDC reserves the right to require DSCADA visibility as required. Specific technical requirement will be published by EDC on each individual web page.

The Generator shall be responsible for costs and expenses incurred by the EDC in connection with the purchase, installation, operation, maintenance, testing, repair or replacement of its metering and SCADA (supervisory control and data acquisition) equipment. Facility metering (and data acquisition, as required) equipment shall conform to EDC rules and applicable operating requirements.

All metering devices shall conform to applicable American National Standard Institute (ANSI) C-12 standards, as amended from time to time. Metering of watt-hour, reactive volt-ampere-hour and the associated demand components should conform to ANSI standard C-12. Instrument transformers should conform to ANSI standard C57.13.

This document only addresses SCADA required by the EDC and does not consider additional ISO-NE requirements.

### **6.3 Communications Channels and SCADA**

The EDC may require communications channels between the EDC and the Generating Facility. If so required, the Generator shall be responsible for procuring such communications channels and for

providing protection from transients and over-voltages at both ends of such communication channels. The Generator shall be responsible for all costs and expenses incurred in connection with such communication channels.

#### 6.3.1 SCADA Requirements

6.3.1.1 In order to facilitate safe, efficient and reliable operation of the EPS, any Generating Facility with a size of 500 kW or greater shall have telemetry equipment compatible with the EDC's SCADA. The Generator shall be responsible for all costs and expenses incurred in connection with this telemetry equipment. The quantities to be telemetered are: (i) Phase Voltage; (ii) Line Current; (iii) Real Power (kW); (iv) Reactive power (kVAR); (v) and breaker disconnect status (open/closed) both at the generator and at the Point of Interconnection. The EDC may require the Generating Facility to have additional equipment, such as protective devices, supervisory control and alarms, and a dedicated communication channel(s). The EDC shall advise the applicant of its communications requirements after a preliminary review of the Generator's Interconnection Request.

6.3.1.2 Monitoring, control, and information exchange requirements can be found at the EDC web pages.

6.3.1.3 For Eversource please refer to the DER Information and Technical Requirements.

6.3.1.4 For UI, further requirement details will be provided upon request.

## 7 Testing and Maintenance Requirements

All testing must be completed in accordance with the latest approved version(s) of IEEE 1547 section 5.0 and IEEE 1547.1.

### 7.1 Witnessing of Commissioning Test

7.1.1 The EDC shall have the right to witness the commissioning testing (pre-parallel testing) as defined in the IEEE 1547.1. The Generator shall notify the EDC ten (10) Business Days in advance of the testing so that the EDC may, at its option, have EDC personnel observe the testing, or inspect the installation. Prior to notifying the EDC of the testing, the Generator shall provide a copy of the test

procedure, the as-built one-line and three-line metering and relaying diagram(s), and applicable relay control diagrams for EDC approval. An individual qualified and experienced in testing protective equipment must perform commissioning testing in accordance with the manufacturer's recommended test procedure to prove the settings and requirements of these Technical Requirements. At the completion of the test, the Generator shall provide the EDC with a copy of the test report data. All witness testing will be conducted at the expense of the interconnecting generator.

Testing typically includes, but is not limited to:

- a. CT and CT circuit polarity, ratio, insulation, excitation, continuity and burden tests.
- b. VT and VT circuit polarity, ratio, insulation and continuity tests.
- c. Relay pick-up and time delay tests.
- d. Functional breaker trip tests from protective relays.
- e. Relay in-service test to check for proper phase rotation and magnitudes of applied currents and voltages.
- f. Breaker closing interlocks tests.
- g. Paralleling and disconnection operation.
- h. Anti-islanding function, if applicable.
- i. Non-export function, if applicable.
- j. Synchronizing Controls, if applicable.
- k. Proof of inability to energize deenergized lines.

7.1.2 Prior to final approval by the EDC or anytime thereafter, the EDC reserves the right to test the Generator relaying and control equipment related to the protection of the EDC's system.

7.1.3 The EDC reserves the right to install at a mutually agreed upon location, special test equipment as may be required to monitor the operation and control of the Generating Facility or for evaluating the quality of power produced by the Generating Facility.

7.1.4 Each commissioning test shall include both a calibration check and an actual trip of the circuit breaker or contactor from the device being tested. Visually setting a calibration dial, index or tap is not considered an adequate calibration

## **7.2 Periodic Testing**

7.2.1 The Generator is responsible for the periodic maintenance of all relays, interrupting devices, control schemes, and batteries that involve the protection of the EPS. Batteries shall be load tested

once every twenty-four (24) months, or more frequently based on the manufacturer's recommendations. The test cycle for protective relaying must not be less frequent than once every sixty (60) calendar months or the cycle recommended by the manufacturer, whichever is shorter. The Generator must provide copies of these test records to the EDC. The EDC shall have the right to monitor the periodic maintenance performed.

- 7.2.2 Each routine check shall include both a calibration check and an actual trip of the circuit breaker or contactor from the device being tested. Visually setting a calibration dial, index or tap is not considered an adequate calibration.

### **7.3 Safe Operations and Maintenance**

- 7.3.1 The Generator shall operate, maintain, repair, and inspect, and shall be fully responsible for the Generating Facility and any other associated facilities that it now or hereafter may own unless otherwise specified in the Interconnection Agreement. The Generator and the EDC shall each be responsible for the maintenance, repair and condition of its respective lines and appurtenances on its respective side of the Point of Interconnection. The EDC and the Generator shall each provide equipment on its respective side of the Point of Interconnection that adequately protects the EPS, personnel, and other persons from damage and injury.
- 7.3.2 All maintenance shall be performed as specified in the Interconnection Agreement as executed by the parties.

## **8 Standards and Applicable Guidelines (IEEE, UL, ANSI, etc.)**

### **8.1 Pre-certified Facilities**

Generating Facilities using qualified (certified to UL 1741/1741 SA including IEEE C62.41) inverter-based facilities with power ratings of 25 kW or less requesting an Interconnection on radial systems where the aggregate Generating Facility capacity on the circuit is less than 5% of circuit annual peak load, qualify for Interconnection under "Guidelines for the Interconnection of Residential Single Phase Certified Inverter -Based Generating Facilities 25 kW (ac) and Less".

### **8.2 Non Pre-certified Facilities**

If inverter-based Facilities with power ratings of 25 kW or less are not using qualified inverters, the application shall be reviewed following "Guidelines for Generator Interconnection-Fast Track and Study Process".

### **8.3 Certification of Generator Equipment Packages**

Some Generator equipment packages have been certified. This facilitates the Interconnection since properly certified equipment need not be reviewed by the EDC in as much detail as non-certified equipment. This results in a faster, less costly review process for the Generator.

For more information on certification of generator equipment packages see Attachment IX - Certification of Small Generator Equipment Packages in the Guidelines for Generator Interconnection Fast Track and Study Processes

### **8.4 Codes and Standards**

All the existing codes and standards (in addition to any successor codes and standards) listed in Attachment X - Codes and Standards section of the Guidelines for Generator Interconnection Fast Track and Study Processes shall be applied as appropriate.

## Appendix A

Distributed Generation Paralleling with an Electric Power System		
Protective Relaying Setting Guidelines <sup>1,2,3,4</sup>		
Protective Element	Typical Settings	Comment
Always Required Protection <sup>5</sup>		
27 Under-voltage	Refer to UV1 and UV2 settings in ISO-NE Document “Default IEEE 1547-2018 Setting Requirements”	<p>Primary Function: Anti-Islanding</p> <p>This element operates when its input voltage is less than a predetermined value.</p> <p>Note: Voltage sensing on all three phases shall be used for maximum sensitivity for phase disturbances.</p>
59 Over-voltage	Refer to OV1 and OV2 settings in ISO-NE Document “Default IEEE 1547-2018 Setting Requirements”	<p>Primary Function: Anti-Islanding</p> <p>This element operates when its input voltage exceeds a predetermined value.</p> <p>Note: Voltage sensing on all three phases shall be used for maximum sensitivity for phase disturbances.</p>
81o Over-frequency	Refer to OF1 and OF2 settings in ISO-NE Document “Default IEEE 1547-2018 Setting Requirements”	<p>Primary Function: Anti-Islanding</p> <p>This element responds to the frequency of the system voltage and operates when the frequency exceeds a predetermined value.</p>
81u Underfrequency	<p>(Per IEEE 1547)</p> <p>Refer to UF1 and UF2 settings in ISO-NE Document “Default IEEE 1547-2018 Setting Requirements”</p>	<p>Primary Function: Anti-Islanding</p> <p>This element responds to the frequency of the system voltage and operates when the frequency is less than a predetermined value.</p> <p>Refer to Section 4.10 for guidance on underfrequency tripping.</p>

	(Per NPCC A-03)  81U-1:  58.0Hz trip in 32.0sec  81U-2:  57.5Hz trip in 11.0sec  81U-3:  57.0Hz trip in 0.16sec	Primary Function: Anti-Islanding  This element responds to the frequency of the system voltage and operates when the frequency is less than a predetermined value.  Refer to Section 4.10 for guidance on underfrequency tripping.  Set per NPCC A-03, 8-31-2004, Figure 1.
--	---	---

Additional Protection Requirements <sup>6</sup>		
25  Synch-Check	set per Customer study <sup>7</sup>	<u>Primary Function:</u> Permissive Close  This element supervises the operation of the generator automatic or manual synchronizing system by ensuring proper voltage, phase angle matching, and where appropriate, slip frequency between the EPS and Generator before the breaker is allowed to close. It is important that the appropriate Live/Dead, Line and Bus options be selected to permit breaker closing under other conditions.  For example, if the generator is OFF-LINE and the customer bus is Dead then the 25 relay should permit a Live EPS to Dead Bus close of the EPS/Generator interconnection breaker to restore power to the load.
32  Directional Power	32R (rev):  set to min. possible level (1-10% MAX watts of smallest Genset) (trip in minimum time 5-10 sec MAX)	<u>Primary Function:</u> Export Blocking  This element is used on systems designed as import only systems to ensure no power is exported onto the EPS. When the system is designed to not export power the DG controls are usually set to a "minimum import level" (say 100kW). The difference between this minimum import level and the reverse power setting is the margin before a trip will occur. This relay is set relatively slow to allow the generator import/export controls to respond to sudden load changes which may momentarily cause an export condition. A properly functioning import/export control system will rapidly reduce the generator output back to the target "minimum import level".
	32U (under):  set to target import level (trip in minimum time 5-10 sec MAX)	Primary Function: Anti-Islanding  This element performs a similar function to the 32R element except it ensures the generating facility is always importing some preset level of power. If the import level drops below the "underpower" threshold then the element will operate to trip. This element should be used in cases where a reliable 32R (export trip) cannot be guaranteed.

		<p>For example, if an upstream EPS recloser opens and the Generating Facility backfeeds or islands a small pocket of distribution load there may be insufficient reverse power to ensure a reliable 32R trip. On the other hand if the 32U element is applied to this same case, the Generating Facility would trip after the EPS source is lost since the import power will drop to a zero or negative value which is below the 32U trip threshold.</p> <p>Note: These Import Only systems typically have less complex interconnections since they have limited adverse effects on EPS system voltages and are less likely to have the ability to sustain an EPS island.</p>
46 Negative Sequence Current	set per Customer study <sup>7</sup>	<p><u>Primary Function:</u> Unbalance Detection</p> <p>This element serves to protect both the EPS and generator system from system unbalances including single phasing. Generators may become damaged quickly from high negative sequence currents. This setting is typically based on generator capabilities and may be reviewed by the EDC.</p>
51 Over-current (Phase)	set per Customer study <sup>7</sup>	<p><u>Primary Function:</u> Fault Detection</p> <p>This element provides phase overcurrent protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value.</p>
51N Over-current (Ground)	set per Customer study <sup>7</sup>	<p><u>Primary Function:</u> Fault Detection</p> <p>This element provides ground overcurrent protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value.</p>
51V Over-current (Voltage Control or Restrained)	set per Customer study <sup>7</sup>	<p><u>Primary Function:</u> Fault Detection</p> <p>This element provides backup phase overcurrent protection for system faults under collapsed voltage condition. Many DG units cannot sustain fault current especially above 300% FLA. This element would allow setting the pickup below load current when voltage is depressed. Typically the pickup level is set to 50% of load current when the voltage is reduced below 80% of nominal.</p>
59G Over-voltage (Ground)	set per Customer study <sup>7</sup>	<p>Primary Function: Anti-Islanding</p> <p>This element is intended to detect ground faults in the event that a ground source is lost such as the case of a DG with a Delta winding on the EPS side. This type of transformer connection can result in the classic 173% overvoltage on the unfaulted phases after the EDC station breaker is open. Even if this relay is set very fast there is still a risk of distribution system equipment damage (Reference ITIC Curve in IEEE 1547.2/DRAFT 7, Figure D.5).</p>

67 Directional - Phase	set per Customer study <sup>7</sup>	<p><u>Primary Function:</u> Fault Detection</p> <p>May be required depending on feeder configuration.</p> <p>This element provides directional phase overcurrent protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value in a specified direction.</p>
67N Directional - Phase	set per Customer study <sup>7</sup>	<p>Primary Function: Fault Detection</p> <p>May be required depending on feeder configuration.</p> <p>This element provides directional ground overcurrent protection and operates with an inverse time-current characteristic when its input current exceeds a predetermined value in a specified direction.</p>
86	None	<p><u>Primary Function:</u> Manual Reset Lockout Relay</p> <p>All relay trip elements must operate a manual reset lockout relay which in turn trips isolating circuit breakers preventing reclosing by any means. In some cases utility approval may be obtained to allow certain relay elements to directly trip a breaker, bypassing the lockout relay for special automatic schemes.</p>


NOTES:

- 1) General: This reference is considered a "guide". Engineering judgement must be applied when evaluating each application.
- 2) Intent: These are considered necessary requirements to protect the EPS from the Generating Facility. The Generator is responsible for considering additional protection for its internal system.
- 3) Parallel Operation: These guidelines apply to Generating Facilities operating in parallel with the EPS 100msec or more. The requirements are reduced for applications where paralleling times are less than 100msec.
- 4) Equipment Requirements: Relays shall meet all applicable requirements of Section 4.
- 5) Always Required Protection: All generators must provide these protective relay elements.
- 6) Additional Protection Requirements: Certain Generating Facilities may be required to provide these additional requirements as will be determined by the utility interconnection study or as described in Section 4.

7) Set per Customer Study: The settings for these elements shall be submitted by the Generator to the EDC for review. At the Generator's request the EDC will provide system protection information directly related to the Point of Interconnection.

## Appendix B

### PROTECTION SCHEME TO PREVENT EXTENDED PARALLEL OPERATION (FOR CTTS APPLICATIONS)

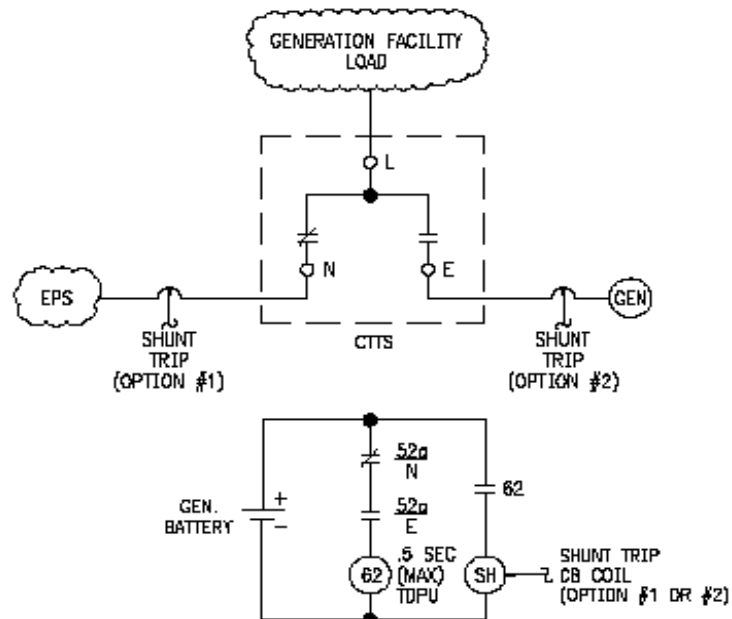

#### LEGEND

- CTTS - CLOSED TRANSITION TRANSFER SWITCH
- N- NORMAL
- E- EMERGENCY
- L- LOAD
- EPS- ELECTRICAL POWER SYSTEM
- SH- GENERATOR OR MAIN CB SHUNT TRIP COIL
- TDPU- TIME DELAY ON PICKUP
- 62- DISCREET TIMER OPERATES TO SHUNT TRIP GENERATOR OR UTILITY MAIN CIRCUIT BREAKER.
- 52a- AUXILIARY CONTACTS MECHANICALLY CONNECTED TO NORMAL AND EMERGENCY POWER CONTACT MECHANISM.

CLOSED TRANSITION  
TRANSFER SWITCH

DATE: 10/18/2007